

JIC MALE / BSPP MALE


Connection sockets

SURFACE MotusCoat™

MATERIAL Steel



Connection 1:	BSP external thread, cylindrical
Sealing form 1:	60° outer cone
Connection 2:	BSPP Cylindrical external threads
Sealing form 2:	74° outer cone
Design:	Connection sockets
Construction:	Straight
Material:	Steel
Surface:	MotusCoat™

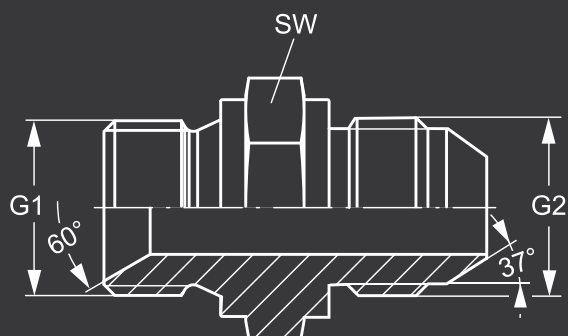

Identification	G1	G2
BPM-JIM-0204-MC	G 1/8"-28	7/16"-20 UNF
BPM-JIM-0205-MC	G 1/8"-28	1/2"-20 UNF
BPM-JIM-0206-MC	G 1/8"-28	9/16"-18 UNF
BPM-JIM-0404-MC	G 1/4"-19	7/16"-20 UNF
BPM-JIM-0405-MC	G 1/4"-19	1/2"-20 UNF
BPM-JIM-0406-MC	G 1/4"-19	9/16"-18 UNF
BPM-JIM-0408-MC	G 1/4"-19	3/4"-16 UNF
BPM-JIM-0604-MC	G 3/8"-19	7/16"-20 UNF
BPM-JIM-0605-MC	G 3/8"-19	1/2"-20 UNF
BPM-JIM-0606-MC	G 3/8"-19	9/16"-18 UNF
BPM-JIM-0608-MC	G 3/8"-19	3/4"-16 UNF
BPM-JIM-0610-MC	G 3/8"-19	7/8"-14 UNF
BPM-JIM-0612-MC	G 3/8"-19	1.1/16"-12 UN
BPM-JIM-0804-MC	G 1/2"-14	7/16"-20 UNF
BPM-JIM-0805-MC	G 1/2"-14	1/2"-20 UNF
BPM-JIM-0806-MC	G 1/2"-14	9/16"-18 UNF
BPM-JIM-0808-MC	G 1/2"-14	3/4"-16 UNF
BPM-JIM-0810-MC	G 1/2"-14	7/8"-14 UNF
BPM-JIM-0812-MC	G 1/2"-14	1.1/16"-12 UN
BPM-JIM-1206-MC	G 3/4"-14	9/16"-18 UNF
BPM-JIM-1208-MC	G 3/4"-14	3/4"-16 UNF
BPM-JIM-1210-MC	G 3/4"-14	7/8"-14 UNF
BPM-JIM-1212-MC	G 3/4"-14	1.1/16"-12 UN
BPM-JIM-1216-MC	G 3/4"-14	1.5/16"-12 UN
BPM-JIM-1612-MC	G 1"-11	1.1/16"-12 UN
BPM-JIM-1616-MC	G 1"-11	1.5/16"-12 UN
BPM-JIM-1620-MC	G 1"-11	1.5/8"-12 UN
BPM-JIM-2020-MC	G 1.1/4"-11	1.5/8"-12 UN

SW = Width across flats