

JIC MALE TEE / NPT MALE RUN

Screw-in socket, L shaped

SURFACE MotusCoat™

MATERIAL Steel



Connection 1: NPT external threads

Sealing form 1: Thread seal

Connection 2+3: UN / UNF external threads


Sealing form 2+3: 74° outer cone

Design: Screw-in sockets

Construction: L shaped

Material: Steel

Surface: MotusCoat™

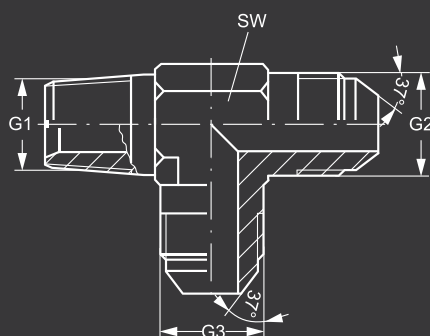

Identification	G1 NPT	G2 + G3 UNF / UN	SW mm
NTM-JIM-JIM-020404-MC	1/8" - 27 NPT	7/16" - 20 UNF	11
NTM-JIM-JIM-020505-MC	1/8" - 27 NPT	1/2" - 20 UNF	14
NTM-JIM-JIM-020606-MC	1/8" - 27 NPT	9/16" - 18 UNF	14
NTM-JIM-JIM-040404-MC	1/4" - 18 NPT	7/16" - 20 UNF	14
NTM-JIM-JIM-040505-MC	1/4" - 18 NPT	1/2" - 20 UNF	14
NTM-JIM-JIM-040606-MC	1/4" - 18 NPT	9/16" - 18 UNF	14
NTM-JIM-JIM-060606-MC	3/8" - 18 NPT	9/16" - 18 UNF	19
NTM-JIM-JIM-060808-MC	3/8" - 18 NPT	3/4" - 16 UNF	19
NTM-JIM-JIM-080808-MC	1/2" - 14 NPT	3/4" - 16 UNF	22
NTM-JIM-JIM-081010-MC	1/2" - 14 NPT	7/8" - 14 UNF	22
NTM-JIM-JIM-081212-MC	1/2" - 14 NPT	1.1/16" - 12 UN	27
NTM-JIM-JIM-121010-MC	3/4" - 14 NPT	7/8" - 14 UNF	27
NTM-JIM-JIM-121212-MC	3/4" - 14 NPT	1.1/16" - 12 UN	27
NTM-JIM-JIM-121414-MC	3/4" - 14 NPT	1.3/16" - 12 UN	33
NTM-JIM-JIM-121616-MC	3/4" - 14 NPT	1.5/16" - 12 UN	33
NTM-JIM-JIM-161616-MC	1" - 11.5 NPT	1.5/16" - 12 UN	33
NTM-JIM-JIM-202020-MC	1.1/4" - 11.5 NPT	1.5/8" - 12 UN	41

SW = Width across flats

Product Version: Stainless Steel (SS)