
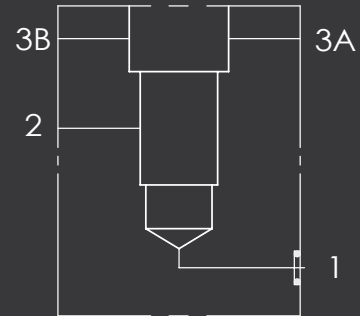


LINE MOUNT BODIES

Ordering Code: **ML-11A3-X-Y 07-Z**

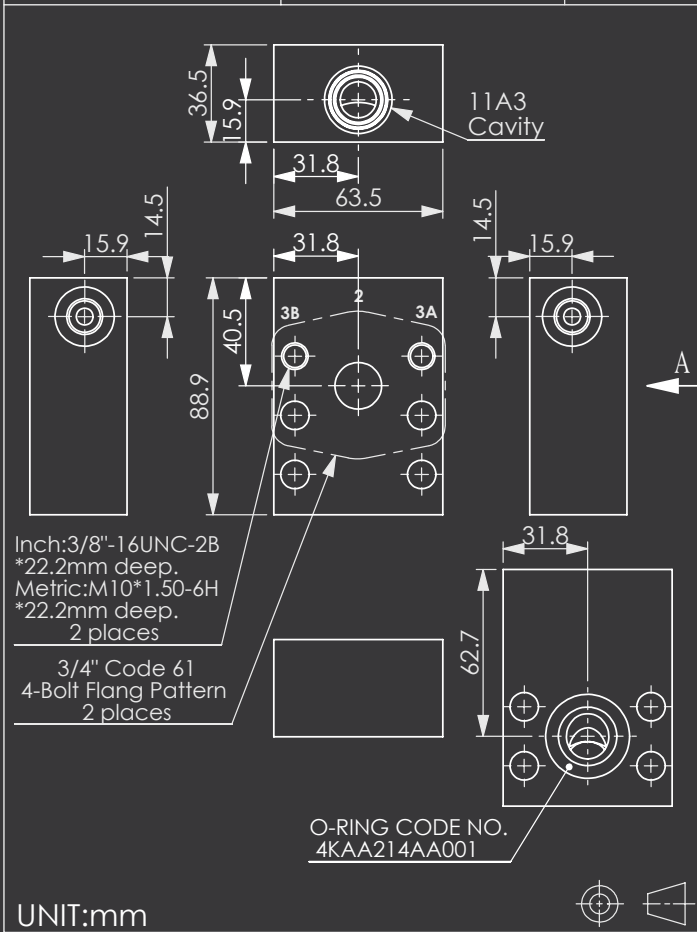

TECHNICAL DATA

Aluminum Body Pressure Rating: 210 bar

Steel Body Pressure Rating: 350 bar

Cavity:

Refer to 11A3

* Refer to Motus Cartridge Valve Catalog.

Aluminum	0.42 kg(WITHOUT VALVES)
----------	-------------------------

* If you need the special specification.
Please contact us.

PORT SIZE

X	PORTS	PORT	MOUNTING DIMENSIONS		
	1,2	3			
F61M06A	3/4" Code 61 (5000 psi) 4-Bolt Flange Pattern	G 1/4"	Metric	M10 x 1.5-6H	
F61E06A	3/4" Code 61 (5000 psi) 4-Bolt Flange Pattern	SAE 6	Inch	3/8"-16 UNC-2B	

Y

BODY MATERIAL

A

HIGH-STRENGTH ALUMINUM

Z

CARTRIDGE VALVES SELECTION

WITHOUT VALVE

RV0A	RV11A30AL (60LPM, 7-210bar)
CB3H	CB11A33HL (60LPM, 70-280bar)
CO20	CO11A3020N (60LPM, 2.0bar)
CC20	CC11A3020N (60LPM, 2.0bar)
SP0A	SP11A30AL (60LPM, 7-210bar)

Please refer to the list price of cartridge program.

Rev.251223

M.11A.602